


Patch cords Duplex LC-SC

P/N: P06D-LCSC-000	OM1 multimode 62,5/125 µm
P/N: P05D-LCSC-000	OM2 multimode 50/125 µm
P/N: POM3D-LCSC-000	OM3 multimode 50/125 µm
P/N: POM4D-LCSC-000	OM4 multimode 50/125 µm
P/N: P09D-LCSC-000	OS2 singlemode 9/125 µm (ITU-T G.652.D)

Note: : patch cord length must be specified in the order.

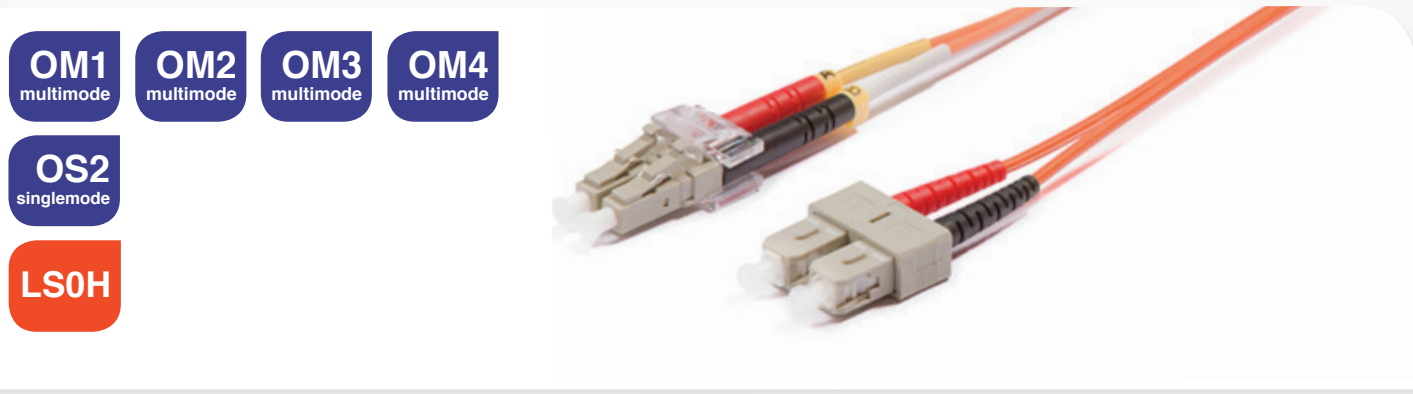

connector LC properties

Connector LC	multimode OM1, OM2, OM3, OM4	singlemode OS2
Polishing	PC	PC
Return loss	≥ 20 dB	≥ 55 dB
Insertion loss	≤ 0,3 dB	0,15 dB (typical)
Ferrule material	ceramic (zirconia)	ceramic (zirconia)
Ferrule diameter	1,25 mm	1,25 mm
Insertion / extraction cycles	min. 1000	min. 1000

connector SC properties

Connector SC	multimode OM1, OM2, OM3, OM4	singlemode OS2
Polishing	PC	PC
Return loss	≥ 20 dB	≥ 55 dB
Insertion loss	≤ 0,3 dB	0,15 dB (typical)
Ferrule material	ceramic (zirconia)	ceramic (zirconia)
Ferrule diameter	2,5 mm	2,5 mm
Insertion / extraction cycles	min. 1000	min. 1000

cable properties

Cabled optical fibre	OM1	OM2	OM3	OM4	OS2
Nominal diameter core / sheath	62,5 / 125 µm	50 / 125 µm	50 / 125 µm	50 / 125 µm	9 / 125 µm
Color	orange	orange	turquoise	purple	yellow
Outer diameter	3 mm a 2 mm	3 mm a 2 mm	3 mm a 2 mm	3 mm a 2 mm	3 mm a 2 mm
Sheath material	LSOH	LSOH	LSOH	LSOH	LSOH
Bending radius (static)	45 mm	45 mm	45 mm	45 mm	45 mm
Temperature range	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C
Attenuation @ 850 / 1300 nm (dB/km)	≤ 3,2 / ≤ 0,8	≤ 3,2 / ≤ 0,8	≤ 3,2 / ≤ 0,8	≤ 3,2 / ≤ 0,8	≤ 3,2 / ≤ 0,8
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	-	-	-	-	≤ 0,4 / ≤ 0,4 / ≤ 0,4

Bandwidth	OM1	OM2	OM3	OM4
850 / 1300 nm (MHz.km) @ LED	200 / 500	500 / 500	1500 / 500	3500 / 500
850 nm (MHz.km) @ LASER	-	-	2000	4700

related products

P/N: RAB-FO-X037-SL	Sliding patch panel for 24 x SC-SC, LC-LC adapters
P/N: KE-SC-MM	SC-SC adapter
P/N: RAB-FO-X04	Splice cassette for 16 splices
P/N: F11002	Splice protection